




# Multiple Use Metric Casing

## OCI: Multiple Use Metric Casing

A segment of the product lines manufactured by OCI is Multiple Use Metric Casing that is marketed both domestically and internationally. There are many varieties of Multiple Use Metric Casing that utilize many different thread forms. The chart which follows is to be used as a reference guide only as additional sizes and options exist. More information can be obtained by contacting one of our team members for assistance.

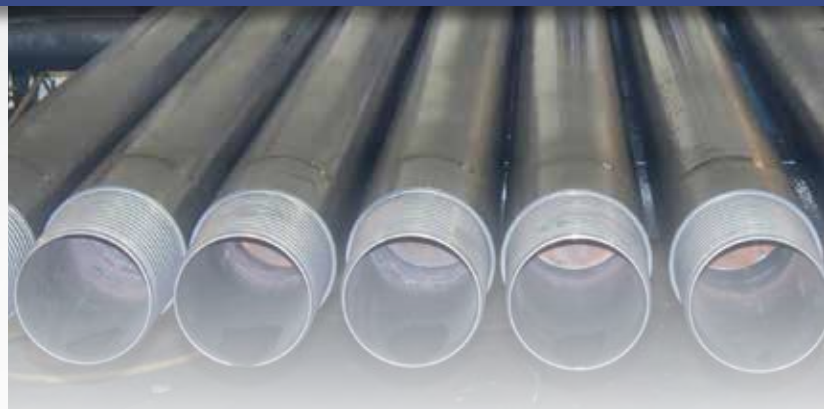

### MULTIPLE USE METRIC CASING - COMMON SIZES

NOMINAL CASING O.D. Inch	NOMINAL CASING O.D. Millimeter	TYPICAL CASING I.D. Inch	TYPICAL CASING I.D. Millimeter	TYPICAL THREAD STARTS	ROTATION DIRECTION	CONICAL OR CYLINDRICAL	ROTARY OR PERCUSSIVE
2.875	73mm	1.900	48.2	1	R.H. & L.H.	BOTH	BOTH
3.000	76mm	2.000	50.8	1	R.H. & L.H.	BOTH	BOTH
3.500	88.9mm	2.500	63.5	1	R.H. & L.H.	BOTH	BOTH
4.000	101mm	3.000	76.2	1 to 3	R.H. & L.H.	BOTH	BOTH
4.500	114mm	3.500	88.9	1 to 3	R.H. & L.H.	BOTH	BOTH
5.000	127mm	4.000	101.6	1 to 3	R.H. & L.H.	BOTH	BOTH
5.250	133mm	4.250	107.9	1 to 3	R.H. & L.H.	BOTH	BOTH
5.500	140mm	4.500	114.3	1 to 3	R.H. & L.H.	BOTH	BOTH
6.000	152mm	5.000	127.0	1 to 3	R.H. & L.H.	BOTH	BOTH
6.625	168mm	5.625	142.8	1 to 3	R.H. & L.H.	BOTH	BOTH
7.000	178mm	6.000	152.4	1 to 3	R.H. & L.H.	BOTH	BOTH
7.625	194mm	6.625	168.2	1 to 3	R.H. & L.H.	BOTH	BOTH
8.000	203mm	7.000	177.8	1 to 3	R.H. & L.H.	BOTH	BOTH
8.625	219mm	7.625	193.6	1 to 3	R.H. & L.H.	BOTH	BOTH
9.625	244mm	8.535	216.7	1 to 3	R.H. & L.H.	BOTH	BOTH
10.750	273mm	9.750	247.6	1 to 3	R.H. & L.H.	BOTH	BOTH
11.750	298mm	10.750	273.0	1 to 3	R.H. & L.H.	BOTH	ROTARY
11.875	302mm	10.711	272.0	1 to 3	R.H. & L.H.	BOTH	ROTARY
12.750	324mm	11.750	298.4	1 to 3	R.H. & L.H.	BOTH	ROTARY
13.375	340mm	12.347	313.6	1 to 3	R.H. & L.H.	BOTH	ROTARY
13.625	346mm	12.375	339.7	1 to 3	R.H. & L.H.	BOTH	ROTARY
14.000	356mm	13.000	330.2	1 to 3	R.H. & L.H.	BOTH	ROTARY
16.000	406mm	15.000	381.0	1 to 3	R.H. & L.H.	BOTH	ROTARY
18.000	457mm	16.875	428.6	1 to 3	R.H. & L.H.	BOTH	ROTARY
20.000	508mm	18.750	476.2	1 to 3	R.H. & L.H.	BOTH	ROTARY
24.000	610mm	22.500	571.5	1 to 3	R.H. & L.H.	BOTH	ROTARY